


## Datasheet

# DTM connector

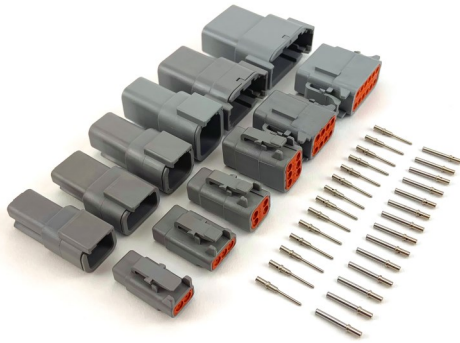

- 2,3,4,6,8 and 12 pin positions
- Male and female connectors
- Max. current 7.5A
- Solid contacts

The Deutsch DTM connector serie consists of low amperage, multi-pin connectors. These connectors are environmentally sealed and stand up to harsh environments. The connectors are made of rugged thermoplastic and feature silicone rear wire and interfacial seals that allow the connectors to withstand conditions of extreme temperature and moisture. Due to its design, the connector and pins are easy to assemble and disassemble if needed.

### Technical Specifications

2,3,4,6,8 and 12 pin positions (male and female)

IP67 sealing

Current per contact: 7.5A max

Solid contacts

Wire size range: 0.35-2.5mm<sup>2</sup>

### Ordering information

C-050-0022	2-pol	Male	€8,-
C-050-0023	3-pol	Male	€9,-
C-050-0024	4-pol	Male	€10,-
C-050-0025	6-pol	Male	€12,-
C-050-0026	8-pol	Male	€14,-
C-050-0027	12-pol	Male	€18,-
C-050-0028	2-pol	Female	€8,-
C-050-0029	3-pol	Female	€9,-
C-050-0030	4-pol	Female	€10,-
C-050-0031	6-pol	Female	€12,-
C-050-0032	8-pol	Female	€14,-
C-050-0033	12-pol	Female	€18,-

All prices are ex. VAT

All connectors are including pins + locking